


State	Proj. No.	Sheet No.
MO		



SWEDGE ANCHOR  
BOLT DETAIL

## GENERAL NOTES:



Another bolt for Type "C" bearing shall be 1" or ASTM A709 Grade 50M steel, 1/2" dia., with no more than 1/4" of the bearing hole extension into the concrete. Another bolt shall be fastened in the plating of concrete or grout in the top of bearing and shall be set approximately 1/4" below the top of bearing.

Anchor bolts shall be coated with a minimum of two coats of inorganic zinc primer (5 ml is minimum).

100% Inductra-Seal machine finish surface.

100% Inductra-Seal for bearing site, included in the weight of the Reinforced Structural Steel.

"S" indicates machine finish surface.  
Shop drawings are not required for the lead plates and the preformed fabric pads.

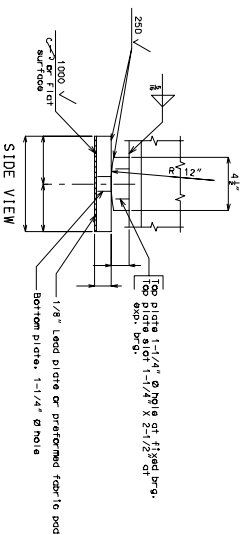

## TYPE "C" BEARINGS

(Estimated weight pounds)

CREATED IN  
MICROSTATION

Detailed  
Checked

**Note:** This drawing is not to scale. Follow dimensions.

Sheet No. of

T:\br-proj\A\_stdib-english-after-06-04\_letting\Bearings-BRG\inwork\brg01\_typec\_std.dgn 12:26:44 PM 06/18/2004

COUNTY	BRG 1
--------	-------